



jaga



Energy
SAVERS
LOW-H₂O

MINI WALL

€ 2019.EX



Energy
SAVERS
LOW-H₂O

MINI WALL

Strikingly discrete

- Extremely suited to spaces with large windows and for dwarf walls under window seats.
- Heights from 8cm
- Beautiful in combination with the free-standing Mini for glazed façades.
- Stable one-piece casing.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Safe surface temperature.
- **A 30 year guarantee** on the heat exchanger.

Also available as freestanding model for glazed façades. See page 72.

MINI WALL sandblast grey (001)



LOW-H₂O
SELECTED AS
THE MOST
ECONOMICAL
RADIATOR

MINI WALL




MINI WALL MOUNTED MODEL




DIMENSIONS (in cm)


HEIGHT 008 (opposite end connections)

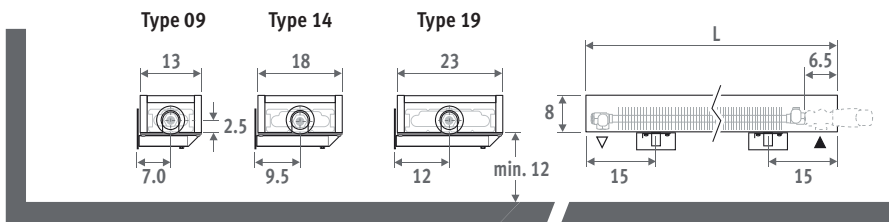

HEIGHT 013

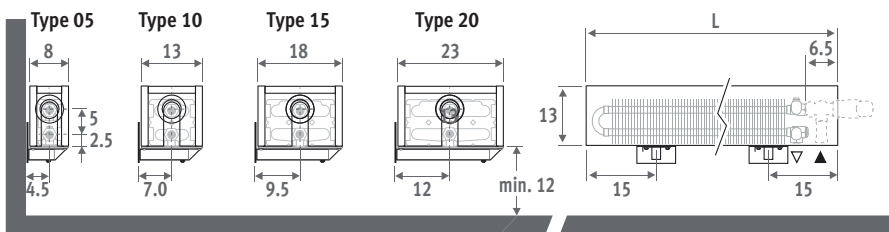


HEIGHT 023 / 028

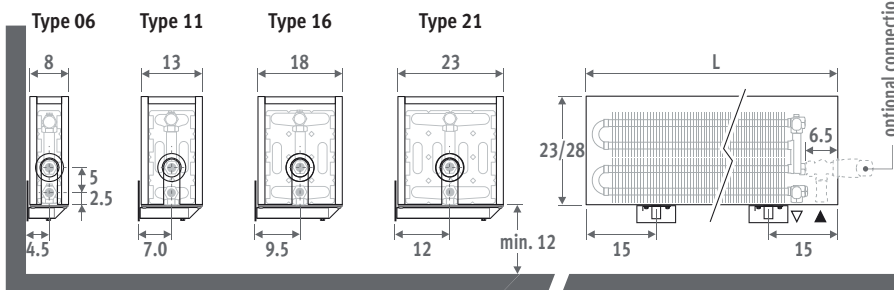

Also available as freestanding model for glazed façades. See page 72.

ORDERING CODE

code	height	length	type	colour
MINW .	008	060	09 .	XXX
<i>fill in colour code ↓</i>				

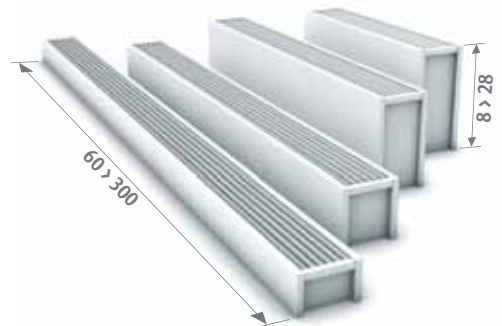

DELIVERY

- Easy to install by one person.
- Standard delivery:
 - Low-H₂O heat exchanger, air vent 1/8" and drain plug 1/2"
 - casing in one piece for connection left or right
 - wall brackets in the same colour as the casing

COLOURS

- Environmentally friendly, scratch-resistant, high UV resistant powder coating.
- Standard colours:
 - traffic white RAL 9016 (133), soft touch lightly structured satin lacquer
 - sandblast grey (001), fine texture metallic lacquer
- Other colours: see colour chart.

CONNECTION

Standard connection:
Height 008: opposite end connection, flow left or right
Other heights: same end connection, left or right connection.




It is not possible to connect to the wall from inside the casing, as the casing includes a closed rear panel.

CONNECTION SETS

Mini height 013/023/028

Connection to the floor:
use set 104 (see page 136)

Connection to the wall:
Jaga H-valve for one or two pipe
TRV head and sleeve couplings Eurocone 3/4" included.

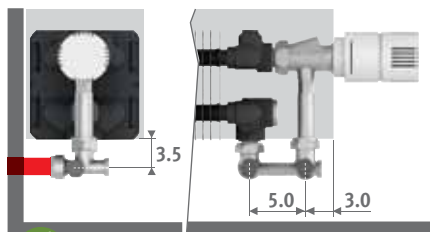

Set 103 CODE 1-PIPE/2-PIPE €

COLO.HBSW.JC.4... **85,80**

COLO.HBSW.JW.4... **75,70**

- fill in sleeve coupling code*
- Precision metal tube 14/1 **114**
 - Precision metal tube 15/1 **115**
 - Precision metal tube 16/1 **116**
 - RPE/ALU tube 16/2 **616**

Other connections:

See chapter "Connection sets and valves" for all connection options and technical information

MINI WALL




MINW.HHH LLL TT.XXX

L	H 008				H 013				H 023				H 028			
	Type	Watts	Watts	€	Type	Watts	Watts	€	Type	Watts	Watts	€	Type	Watts	Watts	€
	75/65	55/45	st. colour	other	75/65	55/45	st. colour	other	75/65	55/45	st. colour	other	75/65	55/45	st. colour	other
060	---	---	---	---	05	10	15	20								
070	---	---	---	---	05	10	15	20								
080	---	---	---	---	05	10	15	20								
090	---	---	---	---	05	10	15	20								
100	---	---	---	---	05	10	15	20								
110	---	---	---	---	05	10	15	20								
120	---	---	---	---	05	10	15	20								
140	---	---	---	---	05	10	15	20								
160	---	---	---	---	05	10	15	20								
180	---	---	---	---	05	10	15	20								
200	---	---	---	---	05	10	15	20								
220	---	---	---	---	05	10	15	20								
240	---	---	---	---	05	10	15	20								
260	---	---	---	---	05	10	15	20								

EN442 output at 20°C room temperature

Mini wall mounted model is also available in lengths 280 and 300 cm, see: www.jaga.com

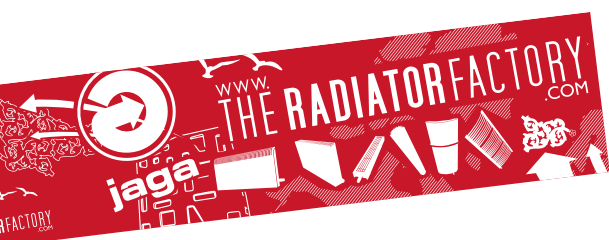

Jaga International
Verbindingslaan 16
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 12
Fax: +32 (0)11 29 41 60
export@jaga.com

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time in line
with our policy of continuous improvement and innovation.
All prices in Euro, exclude VAT. Prices valid from 1st January 2019.
Replaces all existing price lists.