


# jaga

CLIMATE DESIGNERS


Heating 

SANI ELECTRIC € 2021.EX



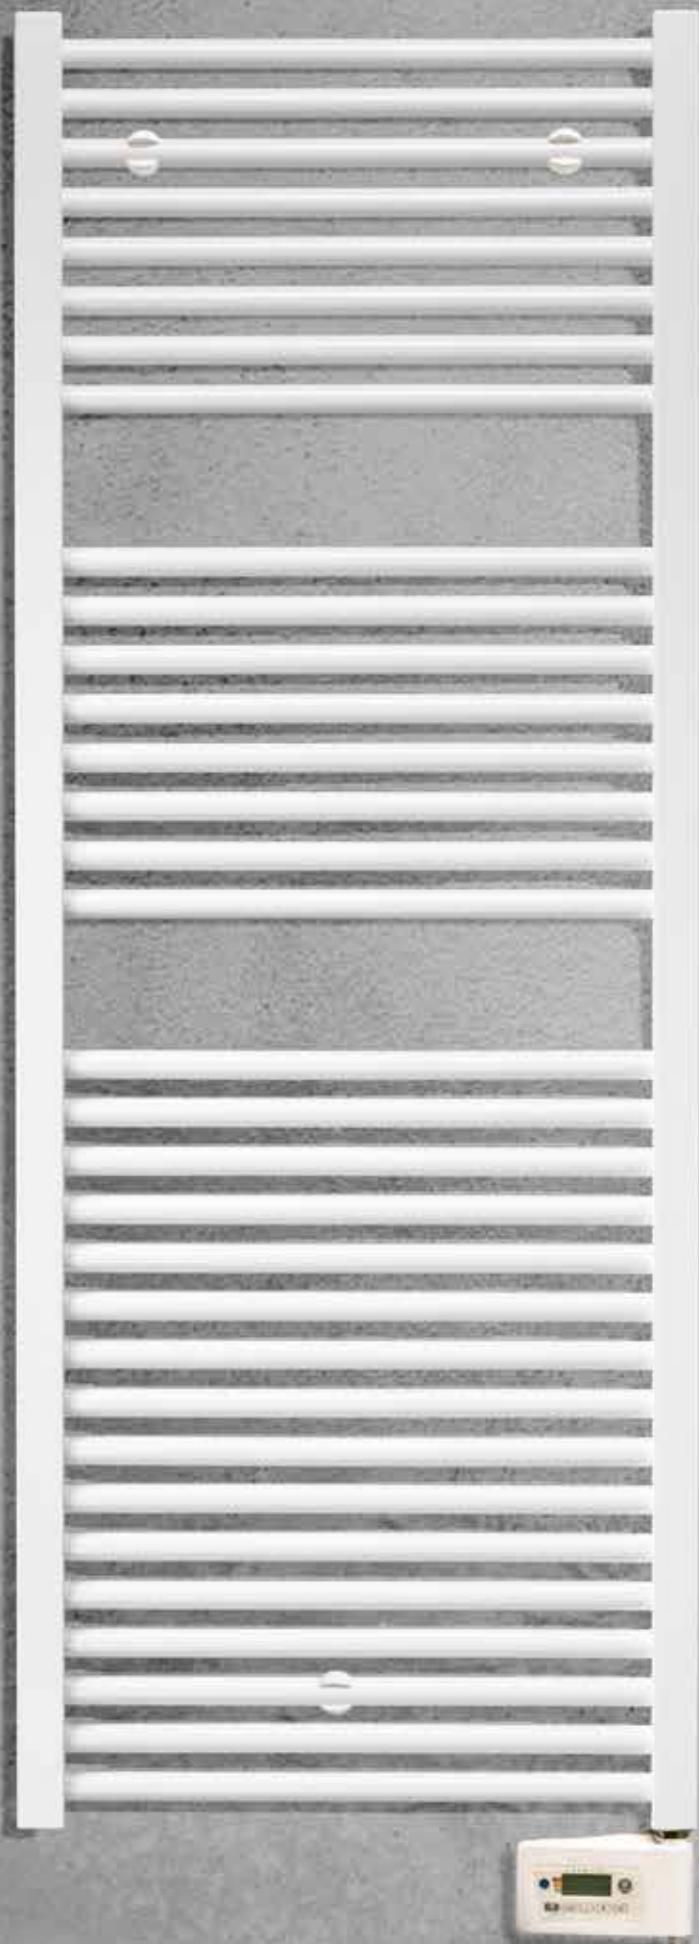

## DIMENSIONS (in cm)

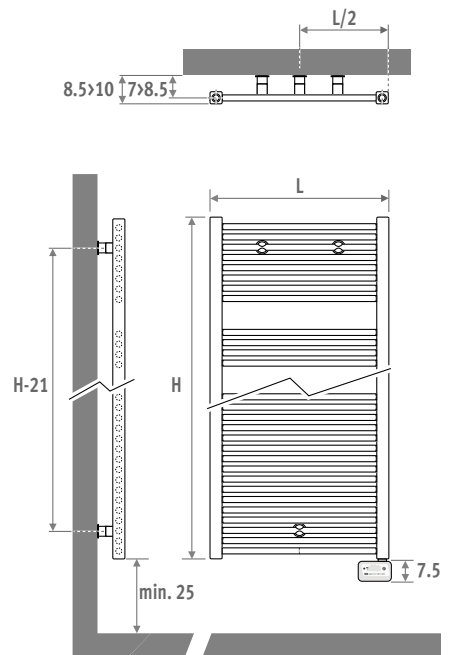

## DELIVERY

- White plastic mounting set for easy wall mounting
- Round, horizontal radiant tubes  $\varnothing$  22 mm
- Vertical steel, square heating collectors 35 mm x 35 mm
- Integrated electrical resistor with mountable controller
- White cable 1.2 m with molded plug
- Pre-filled with heating fluid

## COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (233), smooth glossy finish

## SPECIFICATIONS

- Maximum operating temperature: 110°C
- Voltage: 230V at 50Hz
- Electrical safety class IP 44 splash-proof, suitable for zone A
- isolation class II
- Temperature preset at 19°C, adjustable from +7°C to +30°C

# SANI ELECTRIC

## EASY TO SET

The smart Sani Electric has a user-friendly menu with preset programming profiles for each day of the week. These can easily be adjusted to your needs on the sloping interface with the large keys.

- 5 operating modes: Auto (Program), Boost, Comfort, Eco (economy mode), Frost protection, Standby
- 5 programming profiles
- Manual and temporary cancellation of a program
- Sound-indications when operating
- Keyboard lock for children

**Infrared remote control available as an option.**

## ENERGY EFFICIENT OPERATION

The digital Ecodesign control ensures a stable and accurate temperature and is equipped with all possible energy-saving options.

- Electronic temperature measurement and control
- Open window detection
- Frost protection
- Indication of the current energy consumption by using energy labels A/B/C
- Display of the amount of energy used in kwh/ 24h or since the last reset.
- Automatic switch-off of the boost function, programmable for up to 90 minutes.



**ECOdesign 2018**  
compliant

code	height	length	colour
SEDW . 093	040 . 050	040 . 050	233


	Watt	€
<b>L H 093</b>		
040	300	605,00
050	500	616,00
<b>L H 122</b>		
040	500	673,00
050	750	688,00
<b>L H 137</b>		
040	500	716,00
050	750	734,00
060	1000	764,00
<b>L H 175</b>		
040	750	834,00
050	1000	857,00
060	1000	892,00
<b>L H 205</b>		
060	1250	1024,00

## OPTION REMOTE CONTROL




CODE	€
9096.020101	41,00

## LOCATION OF THE ELECTRIC HEATING UNIT IN THE BATHROOM

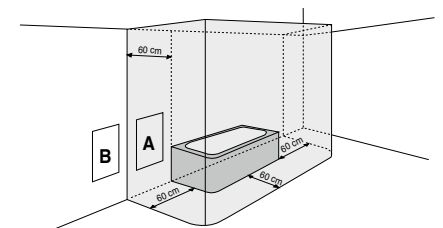

An electrical radiator with insulation class II may be placed in zone A. In bathrooms and kitchens the socket outlet (never a plug contact) has to be placed at a minimum height of 25cm above the floor. The radiator may never be installed lower than the adapter socket outlet. A fused spare has to be used outside the room.

In zone B, an electric radiator of insulation class II may be connected to the electricity grid via a plug contact that is placed in zone B. The appliance must be mounted and connected by an acknowledge installer in accordance with the installation instructions and national and currently applicable local regulations.

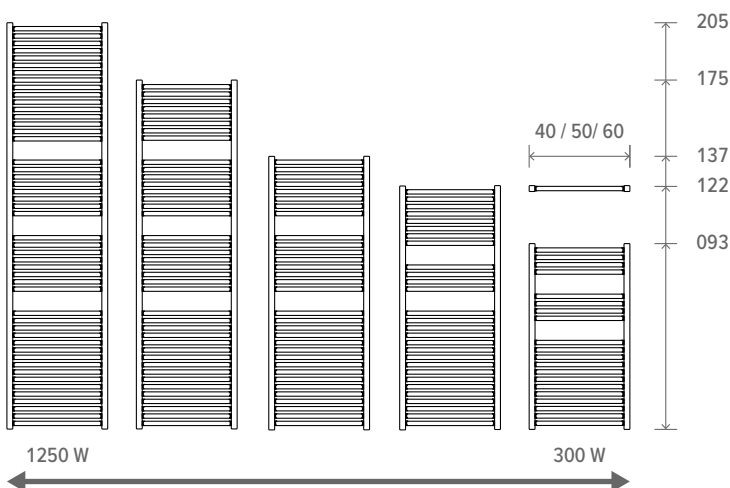

**jaga**  
CLIMATE  
DESIGNERS

Jaga International  
Verbindingslaan 16  
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 12  
Fax: +32 (0)11 29 41 60  
export@jaga.com

The information in this price list is correct at the time of printing.  
Jaga reserves the right to change product specification at any time in line  
with our policy of continuous improvement and innovation.  
All prices in Euro, exclude VAT. Prices valid from February 1, 2021.  
Replaces all existing price lists.