




jaga



BRIZA 22 BUILD-IN
Technical information

BRIZA 22 BUILD-IN



PRESSURE DROP



HEAT EXCHANGER HE1

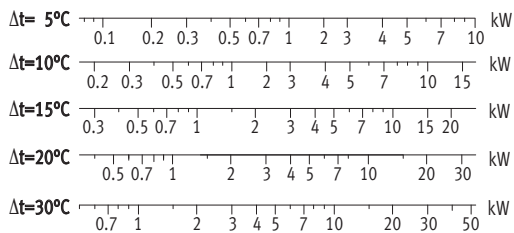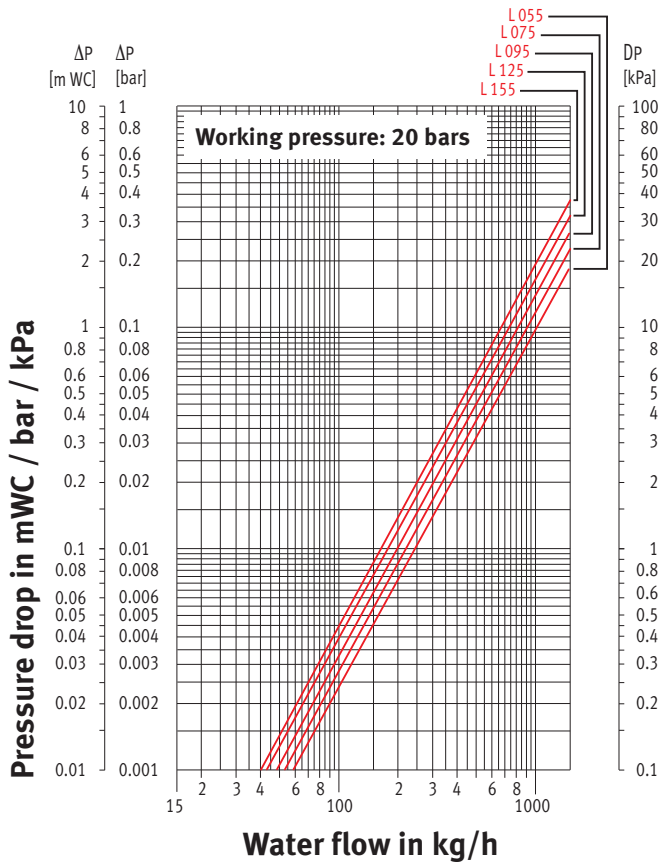

HEAT EXCHANGER HE2

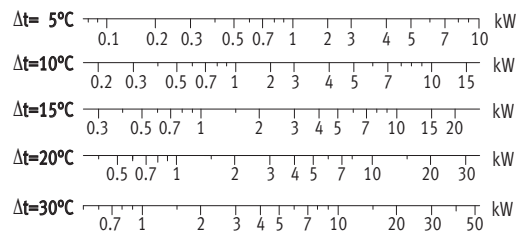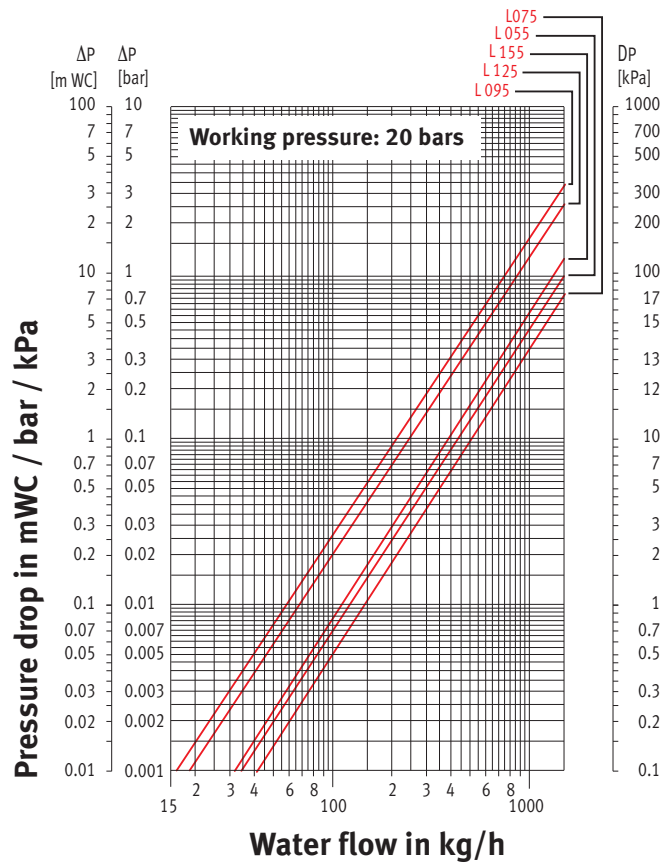

CORRECTION FACTORS

AVERAGE CORRECTION FACTORS ACCORDING TO EN442 - 75/65/20

| Tv | Tl | Tr | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 |
|----|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 90 | 18 | | 0.56 | 0.67 | 0.76 | 0.84 | 0.92 | 0.99 | 1.05 | 1.11 | 1.17 | 1.24 | 1.29 | 1.34 | 1.39 |
| | 20 | | 0.49 | 0.62 | 0.71 | 0.80 | 0.87 | 0.94 | 1.01 | 1.07 | 1.13 | 1.20 | 1.25 | 1.30 | 1.35 |
| | 22 | | 0.42 | 0.56 | 0.66 | 0.75 | 0.83 | 0.90 | 0.97 | 1.03 | 1.09 | 1.16 | 1.21 | 1.26 | 1.31 |
| | 24 | | 0.31 | 0.50 | 0.61 | 0.71 | 0.79 | 0.86 | 0.93 | 0.99 | 1.05 | 1.11 | 1.17 | 1.22 | 1.27 |
| 85 | 18 | | 0.53 | 0.64 | 0.73 | 0.81 | 0.88 | 0.95 | 1.01 | 1.07 | 1.14 | 1.19 | 1.24 | 1.29 | |
| | 20 | | 0.47 | 0.59 | 0.68 | 0.76 | 0.84 | 0.91 | 0.97 | 1.03 | 1.09 | 1.15 | 1.20 | 1.25 | |
| | 22 | | 0.39 | 0.53 | 0.63 | 0.72 | 0.79 | 0.86 | 0.93 | 0.99 | 1.05 | 1.11 | 1.16 | 1.21 | |
| 80 | 24 | | 0.29 | 0.47 | 0.58 | 0.67 | 0.75 | 0.82 | 0.89 | 0.95 | 1.01 | 1.07 | 1.12 | 1.17 | |
| | 18 | | 0.50 | 0.61 | 0.70 | 0.77 | 0.84 | 0.91 | 0.97 | 1.03 | 1.09 | 1.14 | 1.19 | | |
| | 20 | | 0.44 | 0.56 | 0.65 | 0.73 | 0.80 | 0.87 | 0.93 | 0.99 | 1.05 | 1.10 | 1.15 | | |
| | 22 | | 0.37 | 0.50 | 0.60 | 0.68 | 0.76 | 0.82 | 0.89 | 0.95 | 1.01 | 1.06 | 1.11 | | |
| 75 | 24 | | 0.27 | 0.45 | 0.55 | 0.64 | 0.71 | 0.78 | 0.85 | 0.91 | 0.97 | 1.02 | 1.07 | | |
| | 18 | | 0.48 | 0.58 | 0.66 | 0.74 | 0.80 | 0.87 | 0.93 | 0.99 | 1.04 | 1.09 | | | |
| | 20 | | 0.42 | 0.53 | 0.62 | 0.69 | 0.76 | 0.82 | 0.88 | 0.95 | 1.00 | 1.05 | | | |
| | 22 | | 0.35 | 0.48 | 0.57 | 0.65 | 0.72 | 0.78 | 0.84 | 0.91 | 0.96 | 1.01 | | | |
| 70 | 24 | | 0.25 | 0.42 | 0.52 | 0.60 | 0.68 | 0.74 | 0.80 | 0.87 | 0.92 | 0.97 | | | |
| | 18 | | 0.45 | 0.55 | 0.63 | 0.70 | 0.76 | 0.82 | 0.89 | 0.94 | 0.99 | | | | |
| | 20 | | 0.39 | 0.50 | 0.58 | 0.65 | 0.72 | 0.78 | 0.85 | 0.90 | 0.95 | | | | |
| | 22 | | 0.32 | 0.45 | 0.54 | 0.61 | 0.68 | 0.74 | 0.80 | 0.86 | 0.91 | | | | |
| 65 | 24 | | 0.24 | 0.39 | 0.49 | 0.57 | 0.64 | 0.70 | 0.76 | 0.82 | 0.87 | | | | |
| | 18 | | 0.42 | 0.51 | 0.59 | 0.66 | 0.72 | 0.78 | 0.84 | 0.89 | | | | | |
| | 20 | | 0.36 | 0.47 | 0.55 | 0.62 | 0.68 | 0.74 | 0.80 | 0.85 | | | | | |
| | 22 | | 0.30 | 0.42 | 0.50 | 0.57 | 0.64 | 0.70 | 0.76 | 0.81 | | | | | |
| 60 | 24 | | 0.22 | 0.36 | 0.46 | 0.53 | 0.60 | 0.66 | 0.72 | 0.77 | | | | | |
| | 18 | | 0.39 | 0.48 | 0.55 | 0.62 | 0.68 | 0.74 | 0.79 | | | | | | |
| | 20 | | 0.34 | 0.43 | 0.51 | 0.58 | 0.64 | 0.70 | 0.75 | | | | | | |
| | 22 | | 0.28 | 0.39 | 0.47 | 0.54 | 0.60 | 0.66 | 0.71 | | | | | | |
| 55 | 24 | | 0.20 | 0.33 | 0.42 | 0.49 | 0.56 | 0.62 | 0.67 | | | | | | |
| | 18 | | 0.36 | 0.44 | 0.51 | 0.58 | 0.64 | 0.69 | | | | | | | |
| | 20 | | 0.31 | 0.40 | 0.47 | 0.54 | 0.60 | 0.65 | | | | | | | |
| | 22 | | 0.25 | 0.35 | 0.43 | 0.49 | 0.55 | 0.61 | | | | | | | |
| 50 | 24 | | 0.17 | 0.30 | 0.39 | 0.45 | 0.51 | 0.57 | | | | | | | |
| | 18 | | 0.33 | 0.41 | 0.47 | 0.53 | 0.59 | | | | | | | | |
| | 20 | | 0.28 | 0.36 | 0.43 | 0.49 | 0.55 | | | | | | | | |
| | 22 | | 0.22 | 0.32 | 0.39 | 0.45 | 0.51 | | | | | | | | |
| 45 | 24 | | 0.15 | 0.27 | 0.35 | 0.41 | 0.47 | | | | | | | | |
| | 18 | | 0.30 | 0.37 | 0.43 | 0.49 | | | | | | | | | |
| | 20 | | 0.25 | 0.33 | 0.39 | 0.45 | | | | | | | | | |
| | 22 | | 0.20 | 0.28 | 0.35 | 0.41 | | | | | | | | | |
| 40 | 24 | | 0.13 | 0.24 | 0.31 | 0.37 | | | | | | | | | |
| | 18 | | 0.26 | 0.33 | 0.39 | | | | | | | | | | |
| | 20 | | 0.22 | 0.29 | 0.35 | | | | | | | | | | |
| | 22 | | 0.17 | 0.25 | 0.31 | | | | | | | | | | |
| 35 | 24 | | 0.11 | 0.20 | 0.27 | | | | | | | | | | |
| | 18 | | 0.23 | 0.29 | | | | | | | | | | | |
| | 20 | | 0.18 | 0.25 | | | | | | | | | | | |
| | 22 | | 0.14 | 0.21 | | | | | | | | | | | |
| 30 | 24 | | 0.08 | 0.16 | | | | | | | | | | | |
| | 18 | | 0.19 | | | | | | | | | | | | |
| | 20 | | 0.14 | | | | | | | | | | | | |
| | 22 | | 0.10 | | | | | | | | | | | | |
| 24 | | 0.06 | | | | | | | | | | | | | |

The indicated outputs with ΔT 50 and ΔT 30 are the exact outputs. ΔT 50 output measured in accordance with EN 442 and ΔT 30 output calculated according to EN 442. An average correction factor is given in this table for all other ΔT outputs, applicable for all dimensions.

BRIZA 22 BUILD-IN




Weight and water content
without packaging or options

WEIGHT IN KG

| BRIZA 22 BUILD-IN | | |
|-------------------|--------|--------|
| L | 2-pipe | 4-pipe |
| 055 | 17.0 | 1.0 |
| 075 | 21.3 | 1.3 |
| 095 | 27.0 | 1.5 |
| 125 | 35.5 | 2.0 |
| 155 | 44.0 | 2.4 |

WATER CONTENT IN LITER

| BRIZA 22 BUILD-IN | | |
|-------------------|--------|--------|
| L | 2-pipe | 4-pipe |
| 055 | 1.23 | 1.54 |
| 075 | 1.77 | 2.19 |
| 095 | 2.23 | 2.76 |
| 125 | 3.14 | 3.83 |
| 155 | 4.05 | 4.90 |

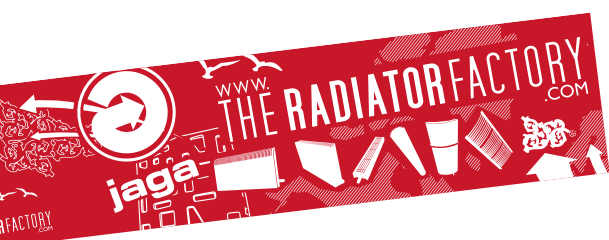

Jaga International
Verbindingslaan 16
B-3590 Diepenbeek

Tel.: +32 11 29 41 12
Fax: +32 11 29 41 60
export@jaga.be
www.jaga.be

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time
in line with our policy of continuous improvement and innovation.