



jaga

**CLIMA CANAL**  
Technical information

# CLIMA CANAL



Weight and water content without packaging or options



## WEIGHT IN KG

CLIMA CANAL		
L	H 008	010
072	6.4	7.8
108	10.1	12.5
144	14.4	17.9
180	18.8	23.9

## WATER CONTENT IN LITRE

CLIMA CANAL	
L	
072	0.120
108	0.279
144	0.439
180	0.598

## PRESSURE DROP

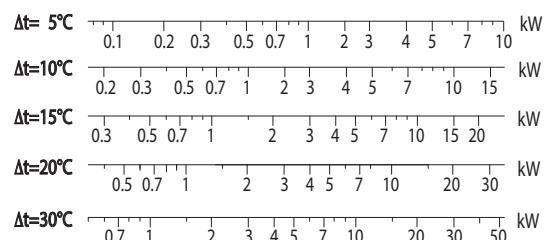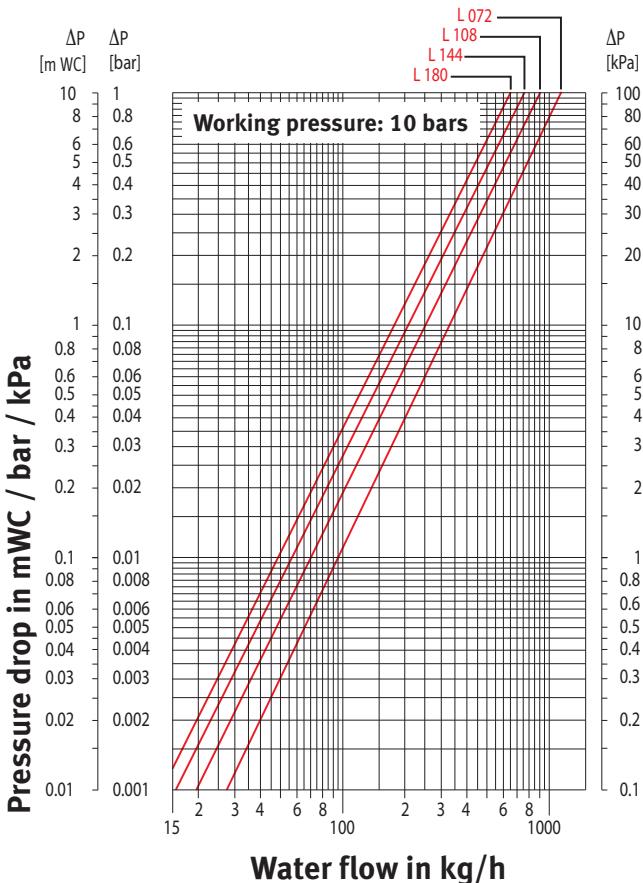


# CORRECTION FACTORS

## AVERAGE CORRECTION FACTORS ACCORDING TO EN442 - 75/65/20°C

Tv	Tl	Tr	25	30	35	40	45	50	55	60	65	70	75	80	85
<b>90</b>	18	0.56	0.67	0.76	0.84	0.92	0.99	1.05	1.11	1.17	1.24	1.29	1.34	1.39	
	20	0.49	0.62	0.71	0.80	0.87	0.94	1.01	1.07	1.13	1.20	1.25	1.30	1.35	
	22	0.42	0.56	0.66	0.75	0.83	0.90	0.97	1.03	1.09	1.16	1.21	1.26	1.31	
	24	0.31	0.50	0.61	0.71	0.79	0.86	0.93	0.99	1.05	1.11	1.17	1.22	1.27	
	85	0.53	0.64	0.73	0.81	0.88	0.95	1.01	1.07	1.14	1.19	1.24	1.29		
<b>85</b>	20	0.47	0.59	0.68	0.76	0.84	0.91	0.97	1.03	1.09	1.15	1.20	1.25		
	22	0.39	0.53	0.63	0.72	0.79	0.86	0.93	0.99	1.05	1.11	1.16	1.21		
	24	0.29	0.47	0.58	0.67	0.75	0.82	0.89	0.95	1.01	1.07	1.12	1.17		
	80	0.50	0.61	0.70	0.77	0.84	0.91	0.97	1.03	1.09	1.14	1.19			
<b>80</b>	20	0.44	0.56	0.65	0.73	0.80	0.87	0.93	0.99	1.05	1.10	1.15			
	22	0.37	0.50	0.60	0.68	0.76	0.82	0.89	0.95	1.01	1.06	1.11			
	24	0.27	0.45	0.55	0.64	0.71	0.78	0.85	0.91	0.97	1.02	1.07			
	75	0.48	0.58	0.66	0.74	0.80	0.87	0.93	0.99	1.04	1.09				
<b>75</b>	20	0.42	0.53	0.62	0.69	0.76	0.82	0.88	0.95	1.00	1.05				
	22	0.35	0.48	0.57	0.65	0.72	0.78	0.84	0.91	0.96	1.01				
	24	0.25	0.42	0.52	0.60	0.68	0.74	0.80	0.87	0.92	0.97				
	70	0.45	0.55	0.63	0.70	0.76	0.82	0.89	0.94	0.99					
<b>70</b>	20	0.39	0.50	0.58	0.65	0.72	0.78	0.85	0.90	0.95					
	22	0.32	0.45	0.54	0.61	0.68	0.74	0.80	0.86	0.91					
	24	0.24	0.39	0.49	0.57	0.64	0.70	0.76	0.82	0.87					
	65	0.42	0.51	0.59	0.66	0.72	0.78	0.84	0.89						
<b>65</b>	20	0.36	0.47	0.55	0.62	0.68	0.74	0.80	0.85						
	22	0.30	0.42	0.50	0.57	0.64	0.70	0.76	0.81						
	24	0.22	0.36	0.46	0.53	0.60	0.66	0.72	0.77						
	60	0.39	0.48	0.55	0.62	0.68	0.74	0.79							
<b>60</b>	20	0.34	0.43	0.51	0.58	0.64	0.70	0.75							
	22	0.28	0.39	0.47	0.54	0.60	0.66	0.71							
	24	0.20	0.33	0.42	0.49	0.56	0.62	0.67							
	55	0.36	0.44	0.51	0.58	0.64	0.69								
<b>55</b>	20	0.31	0.40	0.47	0.54	0.60	0.65								
	22	0.25	0.35	0.43	0.49	0.55	0.61								
	24	0.17	0.30	0.39	0.45	0.51	0.57								
	50	0.33	0.41	0.47	0.53	0.59									
<b>50</b>	20	0.28	0.36	0.43	0.49	0.55									
	22	0.22	0.32	0.39	0.45	0.51									
	24	0.15	0.27	0.35	0.41	0.47									
	45	0.30	0.37	0.43	0.49										
<b>45</b>	20	0.25	0.33	0.39	0.45										
	22	0.20	0.28	0.35	0.41										
	24	0.13	0.24	0.31	0.37										
	40	0.26	0.33	0.39											
<b>40</b>	20	0.22	0.29	0.35											
	22	0.17	0.25	0.31											
	24	0.11	0.20	0.27											
	35	0.23	0.29												
<b>35</b>	20	0.18	0.25												
	22	0.14	0.21												
	24	0.08	0.16												
	30	0.19													
<b>30</b>	20	0.14													
	22	0.10													
	24	0.06													

The indicated outputs with  $\Delta T$  50 and  $\Delta T$  60 are the exact outputs.  $\Delta T$  50 output measured in accordance with EN 442 and  $\Delta T$  60 output calculated according to EN 442. An average correction factor is given in this table for all other  $\Delta T$  outputs, applicable for all dimensions.

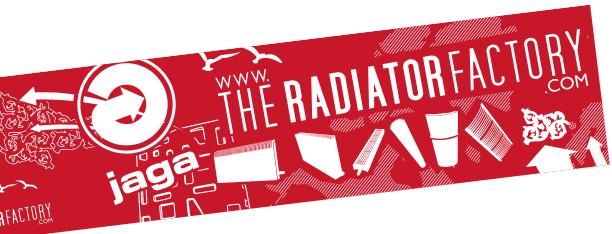

Jaga International  
Verbindingslaan 16  
B-3590 Diepenbeek

Tel.: +32 11 29 41 12  
Fax: +32 11 29 41 60  
E-mail: [export@jaga.be](mailto:export@jaga.be)  
[www.jaga.be](http://www.jaga.be)

The information in this price list is correct at the time of printing.  
Jaga reserves the right to change product specification at any time in  
line with our policy of continuous improvement and innovation.