



jaga

IGUANA
Technical information

IGUANA - WEIGHT - WATER CONTENT



Weight and water content without packaging or options

WEIGHT IN KG

IGUANA APLANO						
L	H 180	192	200	220	240	
030	28.5	30.2	31.4	34.4	37.5	
041	38.8	41.2	42.8	46.8	51.1	
052	49.1	52.2	54.2	59.3	64.7	
063	59.5	63.2	65.6	71.8	78.3	
074	69.8	74.1	77.0	84.2	92.0	
085	80.1	85.1	88.4	96.7	105.6	

IGUANA ARCO						
L	H 180	192	200	220	240	
029	29.0	30.7	31.9	34.9	38.1	
041	39.5	41.9	43.5	47.5	51.9	
051	50.1	53.2	55.2	60.3	65.8	
062	60.5	64.2	66.7	72.8	79.5	
073	71.1	75.4	78.3	85.5	93.4	
083	81.6	86.6	89.9	98.2	107.2	

IGUANA VISIO						
L	H 180	192	200	220	240	
051	28.7	30.4	31a.6	34.5	37.7	
062	33.8	35.9	37.3	40.8	44.4	
073	39.0	41.4	43.0	47.0	51.3	

IGUANA CIRCO WALL						
L	H 180	192	200	220	240	
027	28.7	30.4	31.6	34.5	37.7	
031	33.8	35.9	37.3	40.8	44.4	
034	39.0	41.4	43.0	47.0	51.3	

IGUANA CIRCO CORNER							
L	H 125	150	180	192	200	220	240
027	25.0	29.4	34.6	36.7	38.1	41.6	45.4

IGUANA ANGULA						
L	H 180	192	200	220	240	
040	57.7	61.0	63.4	69.2	75.3	
046	68.3	72.3	75.1	81.9	89.3	
051	78.9	83.5	86.8	94.7	103.2	

IGUANA CIRCO FREESTANDING						
L	H 180	192	200	220	240	
027	84.0	89.6	93.3	102.7	112.0	
031	99.0	105.6	110.0	121.0	132.0	
034	122.7	130.9	136.4	150.0	163.6	

IGUANA CIRCO PILLAR COVER						
L	H 180	192	200	220	240	
027	59.5	63.1	65.4	71.3	77.5	
031	69.7	73.9	76.7	83.6	91.0	
034	80.0	84.8	88.0	96.0	104.5	

WATER CONTENT IN LITRE

IGUANA APLANO						
L	H 180	192	200	220	240	
030	9.6	10.2	10.6	11.7	12.8	
041	13.1	13.9	14.5	16.0	17.4	
052	16.6	17.7	18.4	20.2	22.1	
063	20.0	21.4	22.3	24.5	26.7	
074	23.5	25.1	26.1	28.8	31.4	
085	27.0	28.8	30.0	33.0	36.0	

IGUANA ARCO						
L	H 180	192	200	220	240	
029	9.6	10.2	10.6	11.7	12.8	
041	13.1	13.9	14.5	16.0	17.4	
051	16.6	17.7	18.4	20.2	22.1	
062	20.0	21.4	22.3	24.5	26.7	
073	23.5	25.1	26.1	28.8	31.4	
083	27.0	28.8	30.0	33.0	36.0	

IGUANA VISIO						
L	H 180	192	200	220	240	
051	10.2	10.8	11.2	12.3	13.4	
062	12.0	12.8	13.3	14.6	15.8	
073	13.9	14.8	15.4	16.8	18.3	

IGUANA CIRCO WALL						
L	H 180	192	200	220	240	
027	9.6	10.2	10.6	11.7	12.8	
031	11.3	12.1	12.6	13.8	15.1	
034	13.1	13.9	14.5	16.0	17.4	

IGUANA CIRCO CORNER							
L	H 125	150	180	192	200	220	240
027	8.6	10.2	12.0	12.8	13.3	14.6	15.8

IGUANA ANGULA						
L	H 180	192	200	220	240	
040	19.4	20.7	20.7	22.7	24.8	
046	21.8	23.3	24.3	26.6	29.1	
051	24.9	26.7	27.8	30.5	33.4	

IGUANA CIRCO FREESTANDING						
L	H 180	192	200	220	240	
027	19.2	20.4	21.2	23.4	25.6	
031	22.6	24.2	25.2	27.6	30.2	
034	26.2	27.8	29.0	32.0	34.8	

IGUANA CIRCO PILLAR COVER						
L	H 180	192	200	220	240	
027	19.2	20.4	21.2	23.4	25.6	
031	22.6	24.2	25.2	27.6	30.2	
034	26.2	27.8	29.0	32.0	34.8	

CORRECTION FACTORS


AVERAGE CORRECTION FACTORS
ACCORDING TO EN442 - 75/65/20°C

Tv	Tl	Tr	25	30	35	40	45	50	55	60	65	70	75	80	85
90	18		0.47	0.59	0.70	0.80	0.89	0.98	1.07	1.15	1.23	1.32	1.39	1.46	1.53
	20		0.40	0.53	0.65	0.75	0.84	0.93	1.01	1.09	1.17	1.27	1.34	1.41	1.48
	22		0.32	0.47	0.59	0.69	0.79	0.87	0.96	1.04	1.12	1.21	1.28	1.35	1.42
	24		0.22	0.41	0.53	0.64	0.73	0.82	0.91	0.99	1.07	1.14	1.23	1.29	1.36
85	18		0.44	0.56	0.66	0.76	0.85	0.93	1.01	1.09	1.19	1.25	1.32	1.39	
	20		0.37	0.50	0.61	0.70	0.79	0.88	0.96	1.04	1.12	1.20	1.27	1.34	
	22		0.30	0.44	0.55	0.65	0.74	0.83	0.91	0.99	1.06	1.15	1.21	1.28	
	24		0.20	0.38	0.50	0.60	0.69	0.77	0.85	0.93	1.01	1.09	1.16	1.23	
80	18		0.41	0.52	0.62	0.71	0.80	0.88	0.96	1.04	1.12	1.19	1.25		
	20		0.35	0.47	0.57	0.66	0.75	0.83	0.91	0.98	1.07	1.13	1.20		
	22		0.28	0.41	0.52	0.61	0.70	0.78	0.86	0.93	1.01	1.08	1.15		
	24		0.19	0.35	0.46	0.56	0.64	0.73	0.80	0.88	0.96	1.03	1.09		
75	18		0.38	0.49	0.58	0.67	0.75	0.83	0.90	0.99	1.05	1.12			
	20		0.32	0.44	0.53	0.62	0.70	0.78	0.85	0.94	1.00	1.07			
	22		0.25	0.38	0.48	0.57	0.65	0.73	0.80	0.88	0.95	1.01			
	24		0.17	0.32	0.43	0.52	0.60	0.68	0.75	0.83	0.90	0.96			
70	18		0.35	0.45	0.54	0.63	0.70	0.78	0.86	0.92	0.99				
	20		0.29	0.40	0.49	0.58	0.65	0.73	0.81	0.87	0.94				
	22		0.23	0.35	0.44	0.53	0.61	0.68	0.75	0.82	0.88				
	24		0.15	0.30	0.39	0.48	0.56	0.63	0.70	0.77	0.83				
65	18		0.32	0.42	0.50	0.58	0.65	0.72	0.80	0.86					
	20		0.27	0.37	0.46	0.53	0.61	0.68	0.75	0.81					
	22		0.21	0.32	0.41	0.49	0.56	0.63	0.70	0.76					
	24		0.14	0.27	0.36	0.44	0.51	0.58	0.65	0.71					
60	18		0.29	0.38	0.46	0.54	0.60	0.68	0.74						
	20		0.24	0.34	0.42	0.49	0.56	0.63	0.69						
	22		0.19	0.29	0.37	0.44	0.51	0.58	0.64						
	24		0.12	0.24	0.33	0.40	0.47	0.54	0.59						
55	18		0.27	0.35	0.42	0.49	0.56	0.62							
	20		0.22	0.30	0.38	0.44	0.51	0.57							
	22		0.17	0.26	0.33	0.40	0.46	0.53							
	24		0.10	0.21	0.29	0.36	0.42	0.48							
50	18		0.24	0.31	0.38	0.44	0.50								
	20		0.19	0.27	0.34	0.40	0.46								
	22		0.14	0.23	0.30	0.36	0.42								
	24		0.09	0.18	0.25	0.32	0.37								
45	18		0.21	0.27	0.34	0.40									
	20		0.16	0.23	0.30	0.35									
	22		0.12	0.19	0.26	0.31									
	24		0.07	0.16	0.22	0.27									
40	18		0.18	0.24	0.29										
	20		0.14	0.20	0.26										
	22		0.10	0.16	0.22										
	24		0.06	0.13	0.18										
35	18		0.14	0.20											
	20		0.11	0.16											
	22		0.08	0.13											
	24		0.04	0.10											
30	18		0.11												
	20		0.08												
	22		0.05												
	24		0.02												


The indicated outputs with ΔT 50 and ΔT 60 are the exact outputs. ΔT 50 output measured in accordance with EN 442 and ΔT 60 output calculated according to EN 442. An average correction factor is given in this table for all other ΔT outputs, applicable for all dimensions.

IGUANA - PRESSURE DROP


IGUANA APLANO IGUANA APLANO PLUS

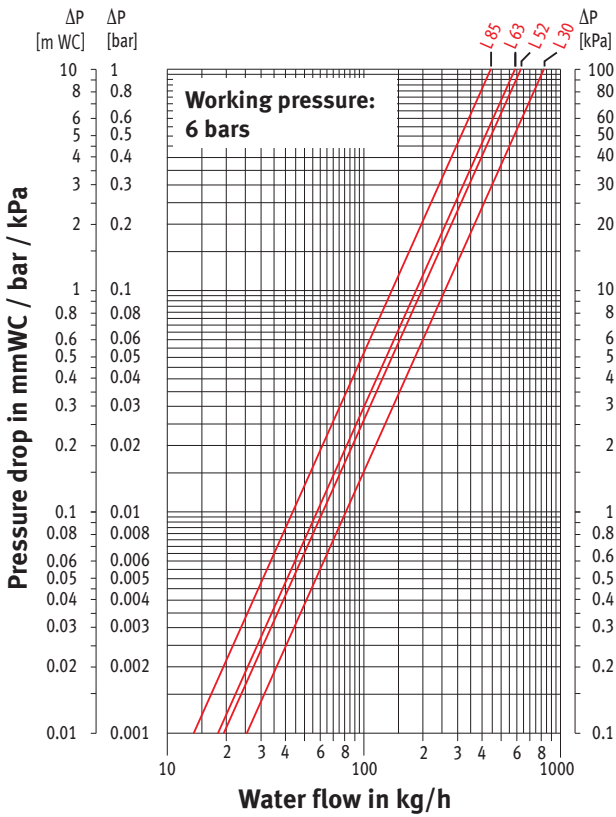


IGUANA ARCO IGUANA ARCO PLUS

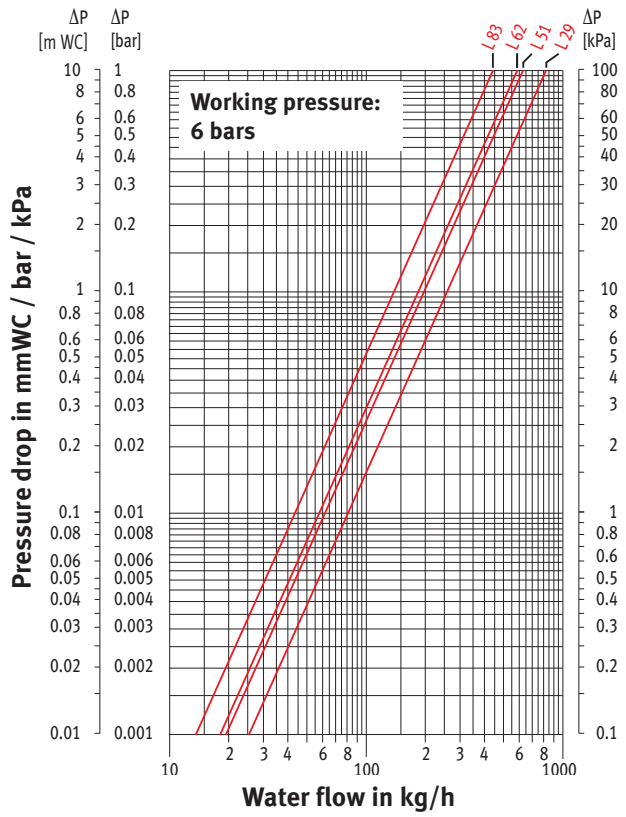

IGUANA VISIO IGUANA VISIO PLUS

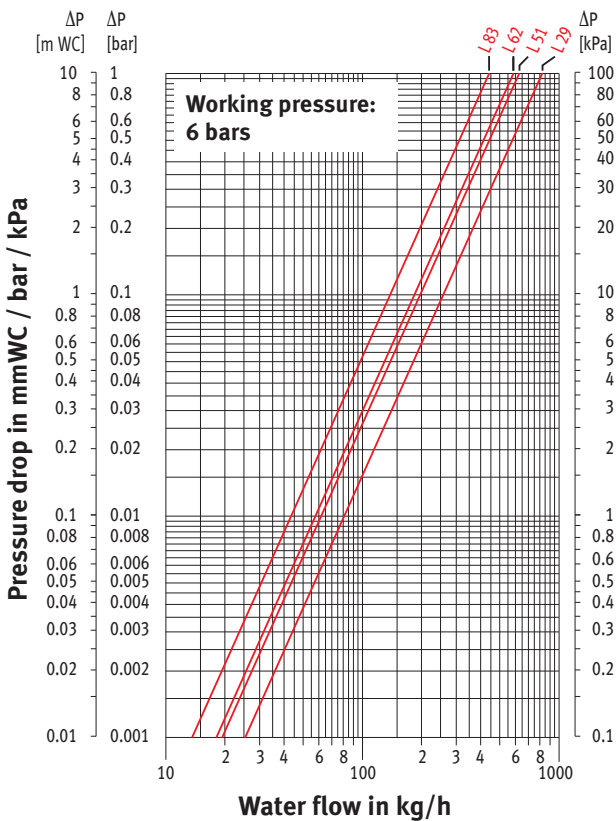


IGUANA CIRCO WALL IGUANA CIRCO WALL PLUS

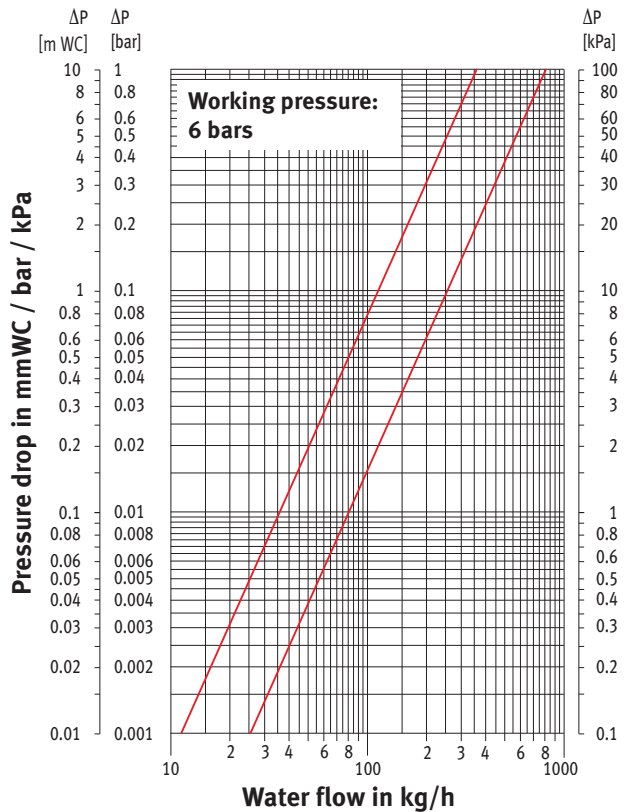


PRESSURE DROP - IGUANA


IGUANA CORNER IGUANA CORNER PLUS

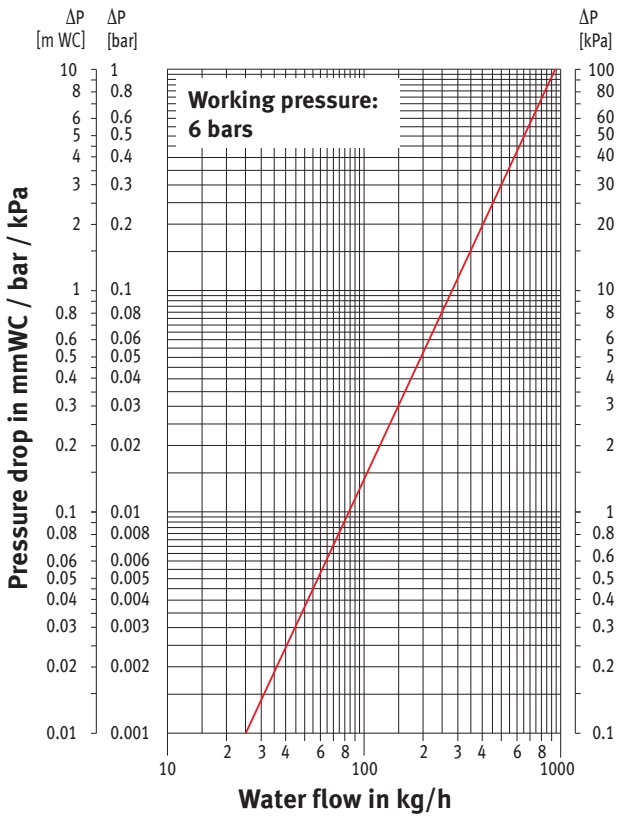


IGUANA ANGULA PLUS

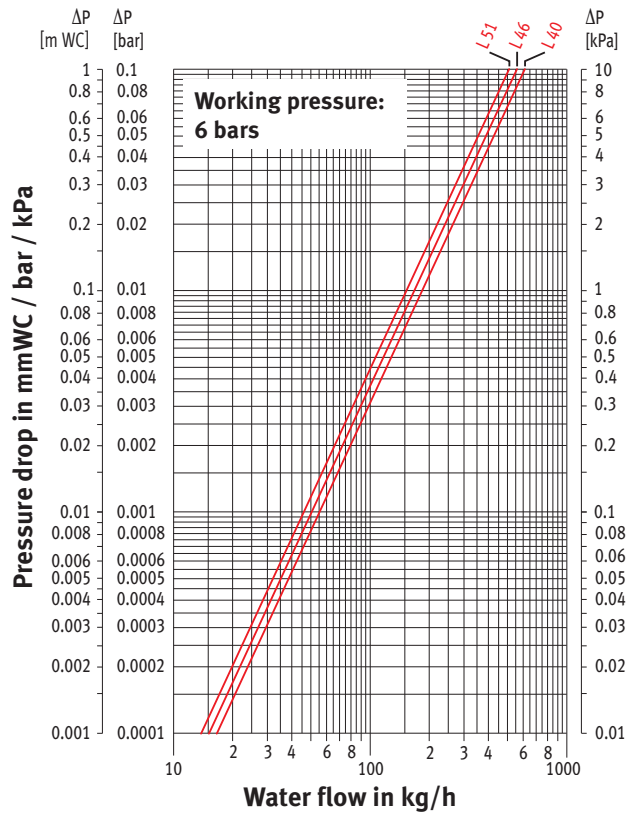


IGUANA CIRCO PILLAR COVER

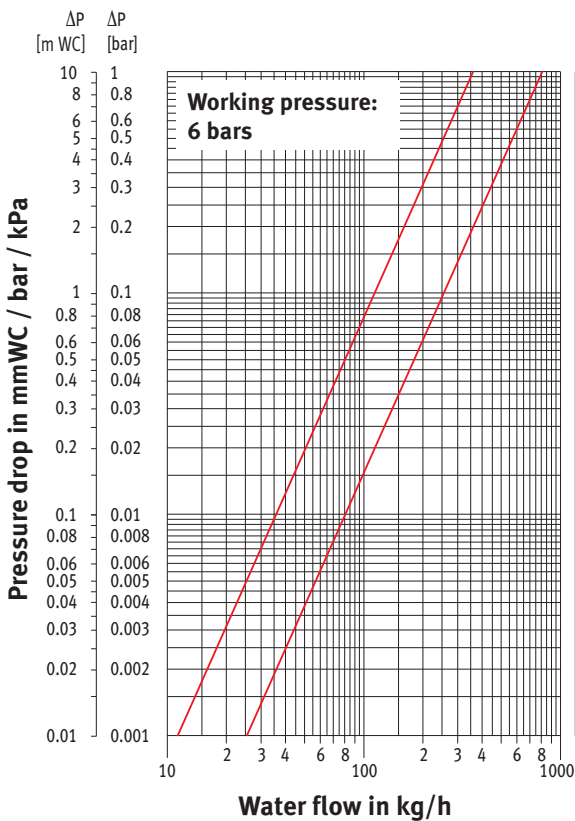

IGUANA CIRCO FREESTANDING

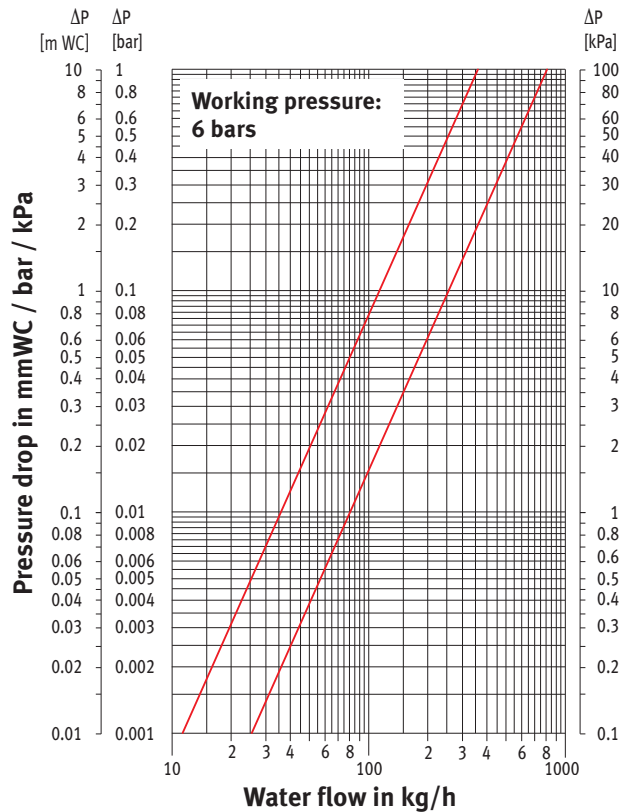

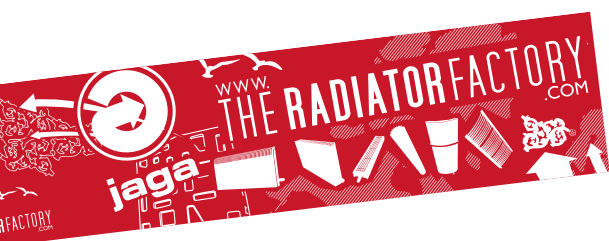

Jaga International
Verbindingslaan 16
B-3590 Diepenbeek

Tel.: +32 11 29 41 12
Fax: +32 11 29 41 60
E-mail: export@jaga.be
www.jaga.be

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time in
line with our policy of continuous improvement and innovation.