



**jaga**

**DECO SPACE / PANEL**  
Technical information

# DECO SPACE / DECO PANEL



Weight and water content without packaging or options

## WEIGHT KG/CM

DECO SPACE						
	H 180	192	200	220	240	260
Single	0.74	0.79	0.82	0.89	0.97	1.04
Double	1.46	1.55	1.61	1.76	1.91	2.06

DECO PANEL VERTICAL						
	H 180	192	200	220	240	260
Single	0.53	0.56	0.58	0.63	0.68	0.73
Double	1.02	1.08	1.12	1.23	1.33	1.43

DECO PANEL HORIZONTAL						
	H 28	34	40	53	66	78
Single	0.08	0.09	0.11	0.15	0.18	0.22
Double	0.14	0.18	0.21	0.28	0.35	0.42


## WATER CONTENT LITRE/CM

DECO SPACE						
	H 180	192	200	220	240	260
Single	0.21	0.23	0.24	0.26	0.28	0.30
Double	0.43	0.45	0.47	0.51	0.55	0.59

DECO PANEL VERTICAL						
	H 180	192	200	220	240	260
Single	0.13	0.14	0.14	0.16	0.17	0.18
Double	0.26	0.28	0.29	0.31	0.34	0.36

DECO PANEL HORIZONTAL						
	H 28	34	40	53	66	78
Single	0.021	0.027	0.032	0.042	0.053	0.063
Double	0.042	0.053	0.063	0.083	0.104	0.125

## PRESSURE DROP

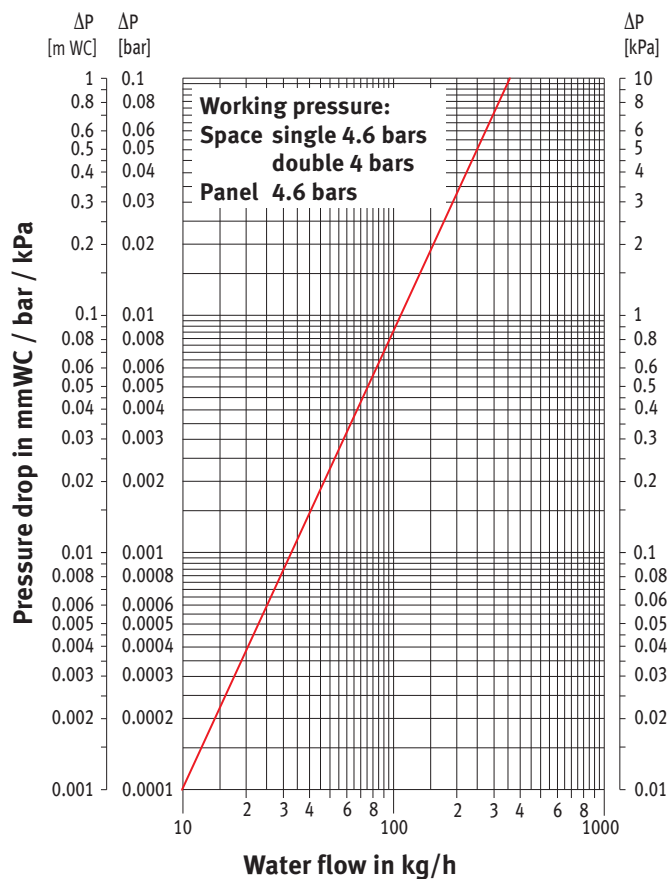


## CORRECTION FACTORS

### AVERAGE CORRECTION FACTORS ACCORDING TO EN442 - 75/65/20°C

Tv	Tl	Tr	25	30	35	40	45	50	55	60	65	70	75	80	85
90	18		0.47	0.59	0.70	0.80	0.89	0.98	1.07	1.15	1.23	1.32	1.39	1.46	1.53
	20		0.40	0.53	0.65	0.75	0.84	0.93	1.01	1.09	1.17	1.27	1.34	1.41	1.48
	22		0.32	0.47	0.59	0.69	0.79	0.87	0.96	1.04	1.12	1.21	1.28	1.35	1.42
	24		0.22	0.41	0.53	0.64	0.73	0.82	0.91	0.99	1.07	1.14	1.23	1.29	1.36
85	18		0.44	0.56	0.66	0.76	0.85	0.93	1.01	1.09	1.19	1.25	1.32	1.39	
	20		0.37	0.50	0.61	0.70	0.79	0.88	0.96	1.04	1.12	1.20	1.27	1.34	
	22		0.30	0.44	0.55	0.65	0.74	0.83	0.91	0.99	1.06	1.15	1.21	1.28	
	24		0.20	0.38	0.50	0.60	0.69	0.77	0.85	0.93	1.01	1.09	1.16	1.23	
80	18		0.41	0.52	0.62	0.71	0.80	0.88	0.96	1.04	1.12	1.19	1.25		
	20		0.35	0.47	0.57	0.66	0.75	0.83	0.91	0.98	1.07	1.13	1.20		
	22		0.28	0.41	0.52	0.61	0.70	0.78	0.86	0.93	1.01	1.08	1.15		
	24		0.19	0.35	0.46	0.56	0.64	0.73	0.80	0.88	0.96	1.03	1.09		
75	18		0.38	0.49	0.58	0.67	0.75	0.83	0.90	0.99	1.05	1.12			
	20		0.32	0.44	0.53	0.62	0.70	0.78	0.85	0.94	1.00	1.07			
	22		0.25	0.38	0.48	0.57	0.65	0.73	0.80	0.88	0.95	1.01			
	24		0.17	0.32	0.43	0.52	0.60	0.68	0.75	0.83	0.90	0.96			
70	18		0.35	0.45	0.54	0.63	0.70	0.78	0.86	0.92	0.99				
	20		0.29	0.40	0.49	0.58	0.65	0.73	0.81	0.87	0.94				
	22		0.23	0.35	0.44	0.53	0.61	0.68	0.75	0.82	0.88				
	24		0.15	0.30	0.39	0.48	0.56	0.63	0.70	0.77	0.83				
65	18		0.32	0.42	0.50	0.58	0.65	0.72	0.80	0.86					
	20		0.27	0.37	0.46	0.53	0.61	0.68	0.75	0.81					
	22		0.21	0.32	0.41	0.49	0.56	0.63	0.70	0.76					
	24		0.14	0.27	0.36	0.44	0.51	0.58	0.65	0.71					
60	18		0.29	0.38	0.46	0.54	0.60	0.68	0.74						
	20		0.24	0.34	0.42	0.49	0.56	0.63	0.69						
	22		0.19	0.29	0.37	0.44	0.51	0.58	0.64						
	24		0.12	0.24	0.33	0.40	0.47	0.54	0.59						
55	18		0.27	0.35	0.42	0.49	0.56	0.62							
	20		0.22	0.30	0.38	0.44	0.51	0.57							
	22		0.17	0.26	0.33	0.40	0.46	0.53							
	24		0.10	0.21	0.29	0.36	0.42	0.48							
50	18		0.24	0.31	0.38	0.44	0.50								
	20		0.19	0.27	0.34	0.40	0.46								
	22		0.14	0.23	0.30	0.36	0.42								
	24		0.09	0.18	0.25	0.32	0.37								
45	18		0.21	0.27	0.34	0.40									
	20		0.16	0.23	0.30	0.35									
	22		0.12	0.19	0.26	0.31									
	24		0.07	0.16	0.22	0.27									
40	18		0.18	0.24	0.29										
	20		0.14	0.20	0.26										
	22		0.10	0.16	0.22										
	24		0.06	0.13	0.18										
35	18		0.14	0.20											
	20		0.11	0.16											
	22		0.08	0.13											
	24		0.04	0.10											
30	18		0.11												
	20		0.08												
	22		0.05												
	24		0.02												

The indicated outputs with  $\Delta T$  50 and  $\Delta T$  60 are the exact outputs.  $\Delta T$  50 output measured in accordance with EN 442 and  $\Delta T$  60 output calculated according to EN 442. An average correction factor is given in this table for all other  $\Delta T$  outputs, applicable for all dimensions.

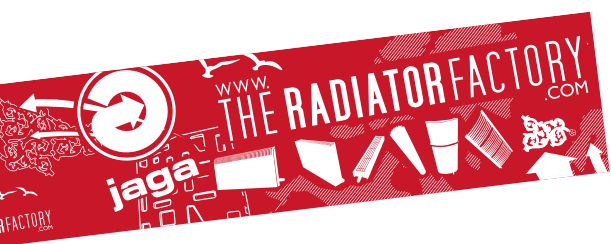

Jaga International  
Verbindingslaan 16  
B-3590 Diepenbeek

Tel.: +32 11 29 41 12  
Fax: +32 11 29 41 60  
E-mail: [export@jaga.be](mailto:export@jaga.be)  
[www.jaga.be](http://www.jaga.be)

The information in this price list is correct at the time of printing.  
Jaga reserves the right to change product specification at any time in  
line with our policy of continuous improvement and innovation.